

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

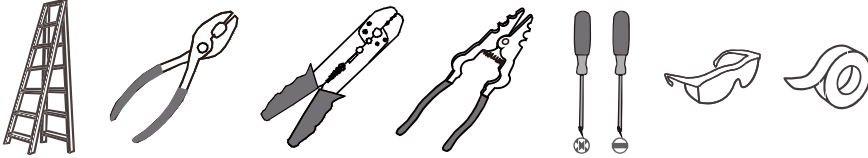


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am – 5:00pm EST), or visit us on-line at www.quozel.com.

PACKAGE CONTENTS




A Fixture Loop
x 1

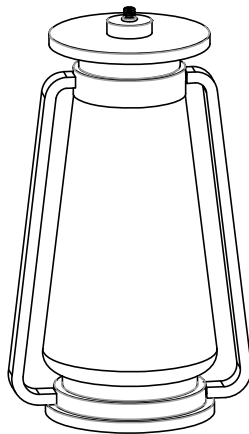


B Fixture Body
x 1

MOUNTING HARDWARE




AA Crossbar Assembly
x 1



BB Wire Connector
x 3



CC Outlet Box Screw
x 2



DD Ceiling Canopy
x 1



EE Quick Link
x 2



FF Fixture Chain
x 1

INSTALLATION

1 Install Fixture Loop

2 Install Crossbar Assembly

Outlet Box

Canopy Lock Ring

3 Install Fixture Chain

* Ceiling Canopy shape is varies depends on items purchased.

Ceiling Canopy

Canopy Lock Ring

OPTIONAL: Adjust Chain as desired, using pliers and soft cloth (neither included) to remove extra links.

4 Pull Supply Wires

Pull the supply wires with ground wire through the chain alternate links.

5 Wiring

Ribbed side of wire from fixture identified with the label "n"

White wire from supply

Smooth side of wire from fixture identified with the label "l"

Black (or red) wire from supply

Ground wire from supply

Ground wire from fixture

Green ground screw

6 Install Ceiling Canopy

* Ceiling Canopy shape is varies depends on items purchased.

7 Install Bulb

Install the correct bulb referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):

BULB BASE TYPE Medium (E26)	BULB SHAPE TYPE A

Your installation is now complete! Restore electricity and save this sheet for future reference.

HOW TO REPLACE GLASS

