

Please go to [www.quoizel.com](http://www.quoizel.com) for product cleaning tips. Go to the **Care + Maintenance** selection.

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (4) G9 Base Clear G9 Xenon Bulbs (not supplied), 40W Maximum.

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

**⚠ Warnings and Cautions**


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Do not touch the bulb with bare hands use a cloth or glove.

**Package Contents**

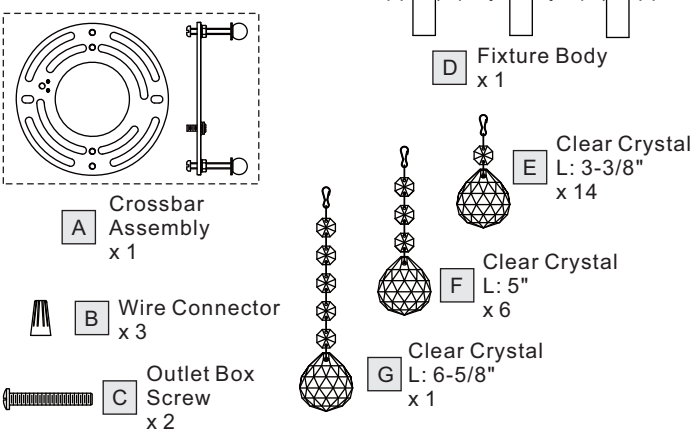


**(Step 2 Continued)**

the ceiling canopy and Fixture Body (D) onto the Crossbar Assembly (A) and secure with mounting balls. Note: The ceiling canopy and Fixture Body (D) should be snug against the ceiling and held tight with the mounting balls. If it is not, adjust the length of the mounting screws on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws in or out of the crossbar until the correct length is achieved. Once the ceiling canopy and Fixture Body (D) is secure, remove the mounting ball and Fixture Body (D) and proceed to Step 3.


**STEP 3 - Wire Connections**

A. Use standard wire connectors (B) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

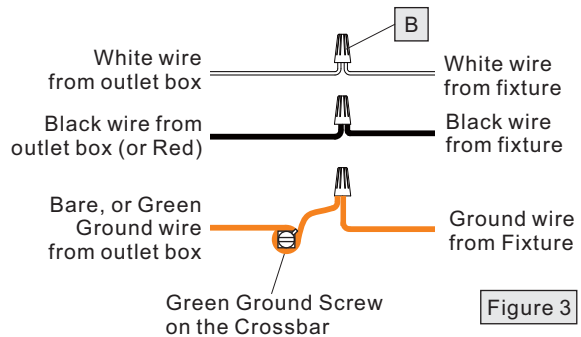



**STEP 1 - Installing the Crossbar Assembly**

A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure the Crossbar Assembly (A) with Outlet Box Screws (C). Tighten until snug.

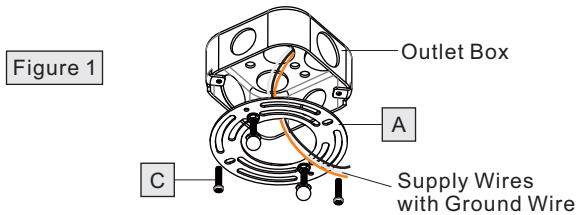

**STEP 4 - Install Fixture Body**

A. Remove Protective Film from Ceiling Canopy. Note: Gloves are required to avoid leaving fingerprints or scratches on ceiling canopy.  
B. Place the ceiling canopy and Fixture Body (D) over mounting screws and secure with mounting balls. Hand tighten until snug.

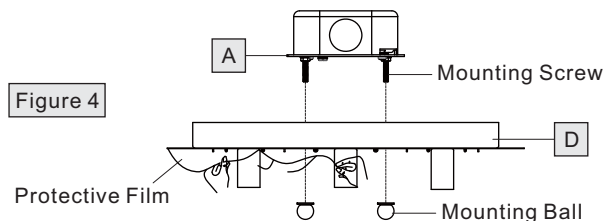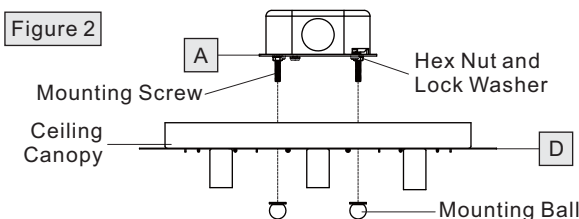

### STEP 5 - Install Bulbs

A. This fixture uses clear G9 Xenon bulbs (not included) with G9 base. Maximum 40 watts. Push snugly into place.

**IMPORTANT:** Do not touch the bulb with bare hands use a cloth or glove.

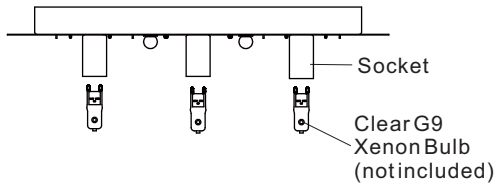


Figure 5

### STEP 6 - Install Crystal to Fixture

A. (Refer to **Crystal Distribution**) Attach the Clear Crystal L6-5/8" (G) to the location "C" on the Ceiling Canopy. Attach Clear Crystal L5" (F) to the location "B" on the Ceiling Canopy. Attach Clear Crystal L3-3/8" (E) to the location "A" on the Ceiling Canopy.

Your fixture is now assembled and ready to use. Enjoy!

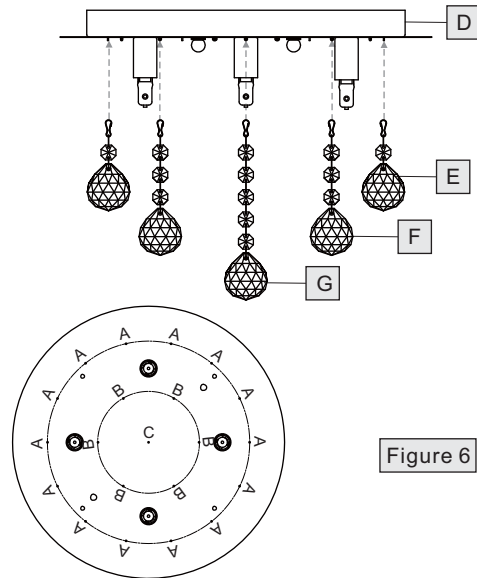


Figure 6

**Crystal Distribution**

### CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.